
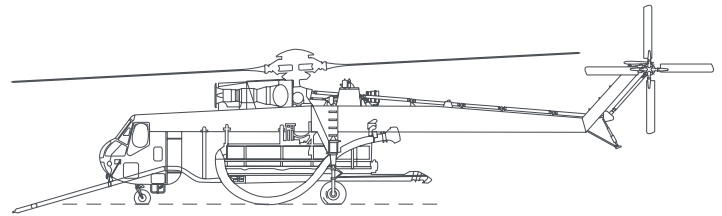
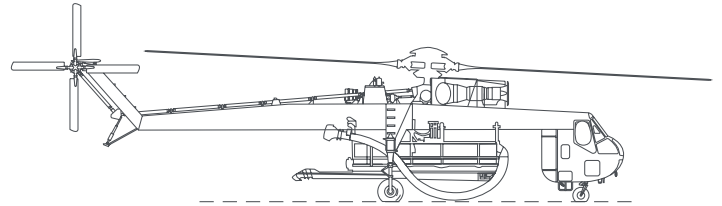


S-64E TECHNICAL AND PERFORMANCE INFORMATION

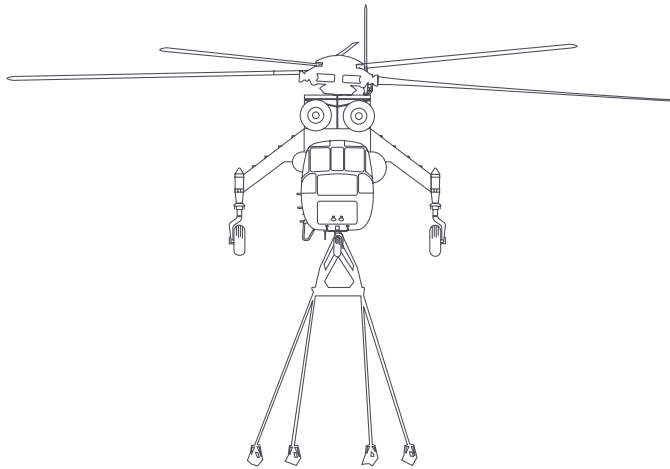

POWER PLANT (2 PRATT AND WHITNEY JFTD12-4A)

Maximum Power Available	9,000 SHP
Single Engine Limit	4,500 SHP / 30 min.
	<i>*Gearbox limit is 4,050</i>

GENERAL

Maximum Gross Weight	42,000 lbs (19,050 kg)
Maximum Hook Weight	20,000 lbs (9,072 kg)
Maximum Cruise Speed	115 kts (212 km/hr)
Maximum Range	238 nm (20 minute reserve) 258 nm (no reserve)

FUSELAGE (FUSELAGE IS NOT PRESSURIZED)

Length*	69 ft 8 in (21.20 m)
Width*	7 ft 1 in (2.13 m)
Width Landing Gear	21 ft 10.70 in (6.67 m)
	<i>*Fuselage only, External Dimensions</i>

MAIN ROTOR

Main Rotor Diameter	72 ft 2.85 in (22.7 m)
Disc Area	4,072 sq. ft (378.3 sq. m)

TAIL ROTOR

Tail Rotor Dimension	16 ft (4.90 m)
Disc Area	201.1 sq. ft (18.7 sq. m)

LANDING GEAR

Main Gear	Wheeled
Nose Gear	Wheeled
Wheel Base	24 ft 4.32 in (7.43 m)

AIRCRAFT EQUIPMENT – CONFIGURATION ITEMS

AVIONICS

- Global Positioning Satellite (GPS)
- BlueSky Tracker
- Satellite Phone (BlueSky Compatible)
- Emergency Locator Transmitter (ELT)
- VHF Radio Packages
- VHF FM
- Mode S Transponder
- SATCOM Antenna
- Radar Altimeter

MISSION-SPECIFIC EQUIPMENT

- Hoists
- Night Vision Goggles (optional)
- Anti-Rotation Device
- Emergency/RON Supply Kits
- FAA Required First Aid/Survival Kits
- Fire Tank
- Foam Cannon
- Sea Snorkel
- Pond Snorkel
- Shock and Pendant
- Hoist
- Grapple
- Cargo Pod

ERICKSONINC.COM

+1 503.505.5800

5550 S Macadam Avenue, Suite 200 | Portland, OR 97239, USA

©2021 Erickson Incorporated. All Rights Reserved.